(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 30 June 2005 (30.06.2005)

PCT

(10) International Publication Number WO 2005/059875 A2

(51) International Patent Classification7:

G09G

(21) International Application Number:

PCT/IB2004/052530

(22) International Filing Date:

24 November 2004 (24.11.2004)

(25) Filing Language:

(26) Publication Language:

English

(30) Priority Data:

03104721.0 16 December 2003 (16.12.2003)

(71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and


- (75) Inventor/Applicant (for US only): VAN DIJK, Roy [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (74) Agents: ROLFES, Johannes, G., A. et al.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, 7.W.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ,

[Continued on next page]

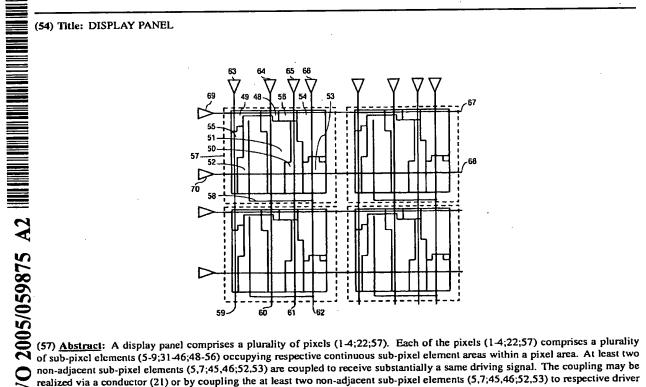

non-adjacent sub-pixel elements (5,7;45,46;52,53) are coupled to receive substantially a same driving signal. The coupling may be realized via a conductor (21) or by coupling the at least two non-adjacent sub-pixel elements (5,7;45,46;52,53) to respective driver circuits receiving substantially a same input signal.